


## ISO Cleanliness Levels

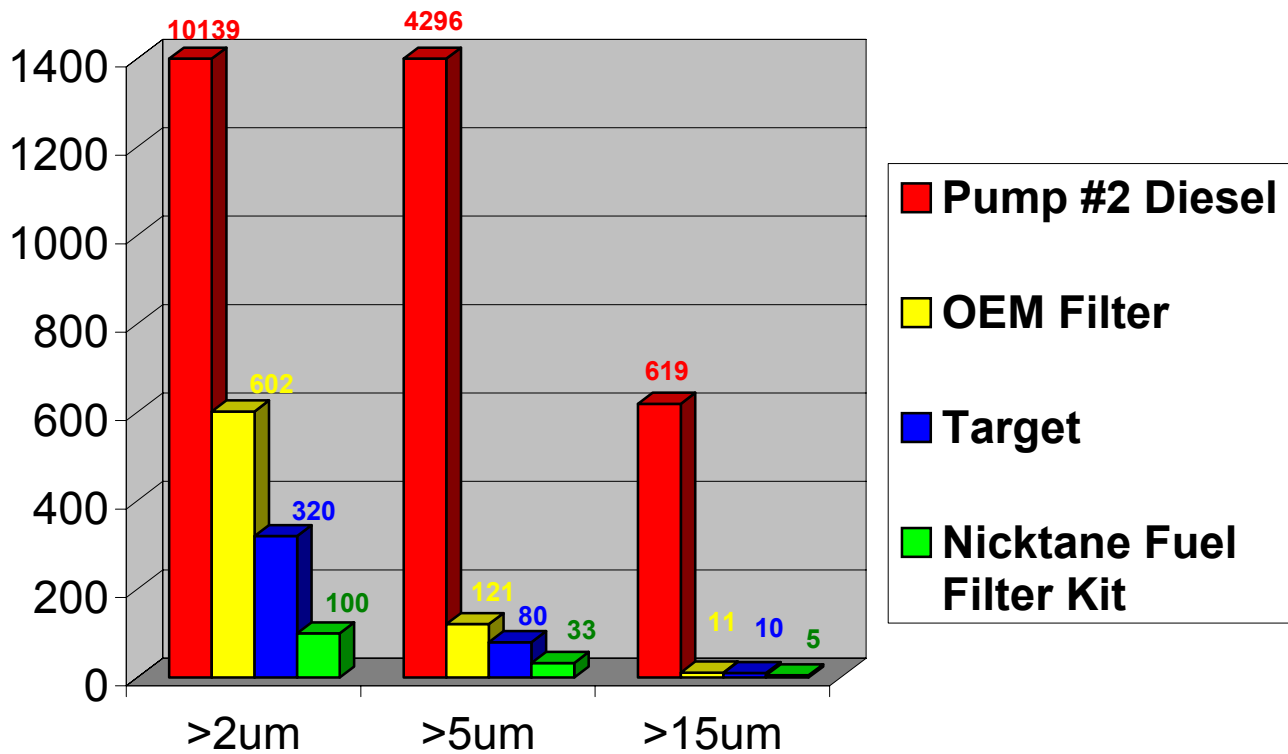

**Pump Diesel #2**

Particles Per US Gallon of Fuel		
	Actual	Target
>2um	38,376,115	1,211,200
>5um	16,260,360	302,800
>15um	2,342,915	37,850
>2 actual	<b>10139</b>	320
>5 actual	<b>4296</b>	80
>15 actual	<b>619</b>	10

ISO Cleanliness Code **21/19/16**

**With OEM Filter Only**

Particles Per US Gallon of Fuel		
	Actual	Target
>2um	2,278,570	1,211,200
>5um	457,985	302,800
>15um	41,635	37,850
>2 actual	<b>602</b>	320
>5 actual	<b>121</b>	80
>15 actual	<b>11</b>	10

ISO Cleanliness Code **16/14/11**

**With Nicktane Fuel Filter Kit**

Particles Per US Gallon of Fuel		
	Actual	Target
>2um	378,500	1,211,200
>5um	124,905	302,800
>15um	18,925	37,850
>2 actual	<b>100</b>	320
>5 actual	<b>33</b>	80
>15 actual	<b>5</b>	10

ISO Cleanliness Code **14/12/9**

**Target ISO Cleanliness Code 15/13/10**

This shows the cleanliness level the OEM injection system was designed for

Note: "um" = Micron